

PAINTS & ACCESSORIES

2023 CATALOGUE

www.casstech.co.zw



RUST-OLEUM

Primers	••••	3
Painters Touch +	••••	4
Chalked Paint Brush	••••	5
Cracked Paint Spray	••••	7
Milk Paint Brush	••••	9
Paint For Plastic	••••	10
Chalkboard	••••	10
Appliance Epoxy	••••	11
Frosted Glass	••••	12
Glow In The Dark	••••	12
High Heat	••••	13
Lacquer	••••	14
Polyurethane Spray	••••	14
Mirror Effect	••••	15
Triple Thick Glaze	••••	15
Decor Metallic	••••	16
Designer Metallic Spray	••••	16
American Accents - Stone Creations	••••	17
Stops Rust - Bright Coat	••••	18
Stops Rust - Enamel	••••	19
Stops Rust - Hammered	••••	19
Stops Rust - Vintage Metallic	••••	20
Stops Rust - Multi-Coloured Textured	••••	20
Stops Rust - Metallic	••••	21
Stops Rust - Textured	••••	21
Stops Rust - Anti-Slip	••••	21
Tub & Tile	••••	22
LeakSeal	••••	22
Industrial Choice Anti-Slip	••••	23
PeelCoat	••••	23
Automotive	••••	24



25
26
30
30
31
32
33
34
34
34
35
35



PRIMERS

Rust-Oleum Zinsser Primers have a wide variety of product depending on the substate to be painted. Please refer to the primer guide for more information





	I					
Product Image	Product Code 2001	<u>Barcodes</u> 47719020011	Brand RUST-OLEUM	Platfrom BULLS EYE 123	<u>Description</u> WHITE	<u>Size</u> 3.78L
123 PIMATA	2004	47719020042	RUST-OLEUM	BULLS EYE 123	WHITE	946ml
2.4	2008	47719020080	RUST-OLEUM	BULLS EYE 123 SPRAY	WHITE	384ml



PAINTERS TOUCH +

Painter's Touch Plus contains more solids and premium pigments providing ultimate hiding power and superior coverage, allowing you to complete projects faster and easier. It's a Premium brand of multiple-purpose spray paint that delivers superior coverage in a wide variety of classic and trendy colours.





	Ovverc						
Practical Coverage	:		1.2m² - 1.5m2				
Dry Times:							
Touch			20 Minutes				
Handle			1 hour & full cure at				
Recoat				rst coat otherwise after 4	48 hours		
Shelf Life:			5 years				
Application:			Shake can vigorously for 2 minutes after mixing ball begins to rattle. Hold can uprigit to 30cm from substrate and spray in steady back and forth motion, slightly overlapp each stroke. Keep the can in motion whilst spraying. Apply two or more light coats a minutes apart to avoid drips and runs. Do not use near open flame. Note: Inexperier operators should practice on scrap surfaces to first get the "feel" for spray paint application.			ghtly overlapping e light coats a few ote: Inexperienced	
Priming:				Rust-Oleum primer prior to rosion resistance and covenetal.			
Substrates / Surfaces:			Wood, metal, wicker & most plastics				
Clean Up:			Lacquer Thinner				
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	<u>Description</u>	<u>Size</u>	
1007	201417	20066386252	RUSTOLEUM	PAINTERS TOUCH +	GLOSS PINK PEONY	340g	
SIV	333291	20066385583	RUSTOLEUM	PAINTERS TOUCH +	GLOSS MODERN MINT	340g	
Page 1	300342	20066321574	RUSTOLEUM	PAINTERS TOUCH +	FLAT BLACK	340g	



CHALKED PAINT BRUSH

Rust-Oleum® Chalked Paint creates an ultra matte finish with excellent coverage and adhesion. It transforms and rejuvenates furniture and home décor with a finish. Chalked Paint provides one coat coverage on most smooth matt surfaces without special surface preparation or priming. It can be painted or distressed, giving any project a one of a kind look. Use on wood, metal, ceramic, glass, canvas and more.



Practical Coverage:			9.7 - 13.2m ² / L (fro	om tds) Substrate dependi	ng			
Dry Times:			I 20i					
Touch:			30 min					
Handle:			1 hours					
Recoat:			2 to 4 hours					
Shelf Life:			3 years					
Application:			furniture and home	itte finish with superior adh décor with timeless elegar f a kind look with a vintage	nce. It can be painted or			
Substrates / Surfac Clean Up:	es:		Wood furniture, pla Soap and water	ster masonary, canvas				
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	<u>Description</u>	Size		
Chalked,	287722	20066295776	RUSTOLEUM	CHALKED MATT CLEAR TOPCOAT	CLEAR	1L		
A CONTRACTOR OF THE CONTRACTOR	285151	6009550100998	RUSTOLEUM	CHALKED PAINT	BUTTERCUP	1L		
Child	285152	6009550101001	RUSTOLEUM	CHALKED PAINT	DEEP LAVENDER	1L		
Challed and a state of the stat	285153	6009550101018	RUSTOLEUM	CHALKED PAINT	BLUSHING CORAL	1L		
Cholked	285154	6009550101025	RUSTOLEUM	CHALKED PAINT	PEBBLE	1L		
Challed America	285155	6009550101032	RUSTOLEUM	CHALKED PAINT	AMETHYST	1L		
EUSPOLEIN (Mp.)	285156	6009550101049	RUSTOLEUM	CHALKED PAINT	ENGLISH MUSTARD	1L		
Chalke	285157	6009550101056	RUSTOLEUM	CHALKED PAINT	GREEN SPROUT	1L		



ROSTOLINA	285139	20066277505	RUSTOLEUM	CHALKED PAINT	SERENITY BLUE	1L
RUSTOLIUM	285140	20066277512	RUSTOLEUM	CHALKED PAINT	LINEN WHITE	1L
Clin Hedy	285141	20066277529	RUSTOLEUM	CHALKED PAINT	COUNTRY GRAY	1L
Chalked,	285142	20066277536	RUSTOLEUM	CHALKED PAINT	BLUSH PINK	1L
RUSTOSSUM	285143	20066277543	RUSTOLEUM	CHALKED PAINT	AGED GRAY	1L
Chalked	329207	20066378479	RUSTOLEUM	CHALKED PAINT	COASTAL BLUE	1L
Clinthed	329211	20066378486	RUSTOLEUM	CHALKED PAINT	FARMHOUSE RED	1L
Chelled	329598	20066379254	RUSTOLEUM	CHALKED PAINT	CHIFFON CREAM	1L
BUSTOUTUM	285144	20066277550	RUSTOLEUM	CHALKED PAINT	CHARCOAL	1L
Chalked	315883	20066347536	RUSTOLEUM	CHALKED DECORATIVE AGED GLAZE	SMOKE	1L
Chalked.	315881	20066347529	RUSTOLEUM	CHALKED DECORATIVE AGED GLAZE	BROWN	1L



CHALKED PAINT SPRAY

Chalked Ultra Matte paint is an easy to use paint that dries to a velvety smooth matte finish. It brings new life to tired and worn pieces in timeless colors. Chalked paint can be distressed to achieve a vintage look that will last.



			and type				
Practical Coverage	:		1.2m² substrate depending				
Dry Times:			T				
Touch:			20 min				
Handle:			1 hour				
Recoat:				rst coat otherwise after 4	18 hours		
Shelf Life:			5 years				
Application:			to 30cm from subst	ly for 2 minutes after mixir rate and spray in steady ba he can in motion whilst spr oid drips and runs.	ack and forth motion, slig	ghtly overlapping	
Substrates / Surfac	es:		Wood, metal, ceran	nic, glass, canvas			
Clean Up:			Clean brush and oth	ner application tools with so	pap and water		
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size	
	302590	20066326319	RUSTOLEUM	CHALKED PAINT SPRAY	CHARCOAL	340g	
B	302591	20066326302	RUSTOLEUM	CHALKED PAINT SPRAY	LINEN WHITE	340g	
	302592	20066326296	RUSTOLEUM	CHALKED PAINT SPRAY	AGED GRAY	340g	
	302593	20066326289	RUSTOLEUM	CHALKED PAINT SPRAY	COUNTRY GRAY	340g	
4	302594	20066326272	RUSTOLEUM	CHALKED PAINT SPRAY	BLUSH PINK	340g	
	302595	20066326265	RUSTOLEUM	CHALKED PAINT SPRAY	SERENITY BLUE	340g	
	302596	20066326258	RUSTOLEUM	CHALKED PAINT SPRAY	CHIFFON CREAM	340g	
	302597	20066326241	RUSTOLEUM	CHALKED PAINT SPRAY	TIDAL POND	340g	



	ı	ı				
	302598	20066326234	RUSTOLEUM	CHALKED PAINT SPRAY	COASTAL BLUE	340g
	329193	20066378400	RUSTOLEUM	CHALKED PAINT SPRAY	FARMHOUSE RED	340g
	329194	20066378417	RUSTOLEUM	CHALKED PAINT SPRAY	COCOA BEAN	340g
	302560	6009550101346	RUSTOLEUM	CHALKED SPRAY	BUTTERCUP	340g
	302561	6009550101353	RUSTOLEUM	CHALKED SPRAY	DEEP LAVENDER	340g
	302562	6009550101360	RUSTOLEUM	CHALKED SPRAY	BLUSHING CORAL	340g
	302563	6009550101377	RUSTOLEUM	CHALKED SPRAY	PEBBLE	340g
	302564	6009550101384	RUSTOLEUM	CHALKED SPRAY	AMETHYST	340g
5.44 ·	302565	6009550101391	RUSTOLEUM	CHALKED SPRAY	ENGLISH MUSTARD	340g
	302566	6009550101407	RUSTOLEUM	CHALKED SPRAY	GREEN SPROUT	340g
	302599	20066326227	RUSTOLEUM	CHALKED PAINT SPRAY	CLEAR	340g



MILK PAINT BRUSH

Rust-Oleum's Milk Paint Finish creates a subtle matte, brushed effect with a light texture. Increased durability and adhesion properties built into the formula means Milk Paint Finish won't chip. Milk Paint Finish is easily layered in order to achieve the desired coverage. Available in 6 on trend colors, Milk Paint Finish will bring new life to any project while preserving an authentic antique feel.













Practical Coverage:			9.7 - 13.2m² / L (from tds) Substrate depending					
Dry Times:					<u> </u>			
Touch			30 min					
Handle			1 hours					
Recoat			2 to 4 hours					
Shelf Life:			3 years					
Application:			Do not apply paint of	on surfaces which are expo een 10° and 32°C and hur				
				ore use. A high quality synt				
				light coat to your surface,				
			washed look. Apply	multiple coats to achieve	desired coverage.			
Substrates / Surface	ae:		Wood (raw and pair	nted), metal, aluminum, gla	nee			
Clean Up:	53.		Soap and water	ited), metal, aldimiliam, gia	133			
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size		
6 mm	331049	20066381356	RUSTOLEUM	MILK PAINT	CLASSIC WHITE	946ml		
The second secon	331050	20066381363	RUSTOLEUM	MILK PAINT	HIGHLAND BLUE	946ml		
MILE PRINT	331051	20066381370	RUSTOLEUM	MILK PAINT	NAVY	946ml		
MILK PRINT	331052	20066381387	RUSTOLEUM	MILK PAINT	ECLIPSE	946ml		
MILK PRINT	331053	20066381394	RUSTOLEUM	MILK PAINT	KINGSTON GRAY	946ml		
PER PERMIT	334195	20066417963	RUSTOLEUM	MILK PAINT	VENETIAN YELLOW	946ml		



PAINT FOR PLASTIC

Rust-Oleum® Specialty Paint For Plastic Spray renews and restores in one step. Apply directly to plastic mailboxes, lawn chairs, storage lockers and more. Provides superior adhesion and long-lasting durability. One-step direct-to-plastic application. For indoor and outdoor use.





Practical Coverage			1.2m² - 1.5m2				
Dry Times:							
Touch:			20 Minutes				
Handle:			1 hour & full cure at	48 hour			
Recoat:			Within 1 hour of fi	rst coat otherwise after 4	8 hours		
Shelf Life:			5 years				
Application:			Shake can vigorously for 2 minutes after mixing ball begins to rattle. Hold can upr to 30cm from substrate and spray in steady back and forth motion, slightly overlar each stroke. Keep the can in motion whilst spraying. Apply two or more light coats minutes apart to avoid drips and runs. Do not use near open flame. Note: Inexper operators should practice on scrap surfaces to first get the "feel" for spray paint application.			ghtly overlapping re light coats a few ote: Inexperienced	
Priming			Use of the correct Rust-Oleum primer prior to application will provide superior adhesion, chip resistance, corrosion resistance and coverage. Priming is especially recommended for bare wood and metal.				
Substrates / Surfac	es:		Wood, metal, wicke	er & most plastics			
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	Description	<u>Size</u>	
Constant of the Constant of th	209460	20066123802	RUSTOLEUM PLASTIC PRIMER WHITE 340g				

CHALKBOARD

Rust-Oleum® Specialty Chalk Board converts surfaces into a usable chalkboard. Apply to metal, wood, plastic, hardboard, glass or paperboard. Erases cleanly.





Practical Coverage	:		1.2m² substrate depending				
Dry Times:							
Touch			20 Minutes				
Handle			1 hour & full cure at	48 hours			
Recoat			Within 1 hour of fi	rst coat otherwise after 4	18 hours		
Shelf Life:			5 years				
Application:			Shake can vigorously for 2 minutes after mixing ball begins to rattle. Hold can upright 20 to 30cm from substrate and spray in steady back and forth motion, slightly overlapping each stroke. Keep the can in motion whilst spraying. Apply two or more light coats a few minutes apart to avoid drips and runs.				
Substrates / Surfac	es:		Wood, hardboard, plaster				
Clean Up:			Lacquer thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	<u>Description</u>	<u>Size</u>	
	1913830	20066191382	RUSTOLEUM	CHALKBOARD	BLACK	312g	





APPLICANCE EPOXY

Rust-Oleum® Specialty Appliance Epoxy is an ultra-hard, moisture resistance enamel that is specifically formulated for indoor metal surfaces. It provides a smooth, washable surface for refinishing the exterior of appliances such as refrigerators, dishwashers, laundry machines, and other indoor metal applications (cabinets, tables). Do not use on objects exposed to heat (stovetops, oven interiors, etc)





			The same of	THE R. L. LEWIS CO., LANSING, MICH.	REAL OF THE PARTY	
Practical Coverage:			0.7m²			
Dry Times:			•			
Touch:			2 - 4 hours (tack fr	ee)		
Handle:			5 – 9 hours			
Recoat:			Within 30 minutes	or after 7 days week		
Shelf Life:			5 years			
Application:			Interior			
Substrates / Surface	es:		Metal			
Clean Up:			Lacquer Thinners			
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size
Service (Service)	7886830	20066788681	RUSTOLEUM	APPLIANCE SPRAY	BLACK	340g
arrange (william)	7887830	20066788780	RUSTOLEUM	APPLIANCE SPRAY	STAINLESS	340g
manage of the state of the stat	7881830	20066788186	RUSTOLEUM	APPLIANCE SPRAY	WHITE	340g
	203000	20066112561	RUSTOLEUM	APR TANCE SP RAY	WHITE	17g



FROSTED GLASS

Rust-Oleum® Specialty Frosted Glass Spray adds a semi-transparent coating for decoration or privacy. Apply to glass or mirrors. Creates the look of custom etched glass when applied with stencils. For decorating or privacy.





			Selling Selling				
Practical Coverage	:		1.1m² per can				
Dry Times:			•				
Touch			5 min				
Handle			10 min				
Recoat			Anytime				
Shelf Life:			5 years				
Application:			Glass doors, window and skylights				
Substrates / Surfac	es:		Glass				
Clean Up:			Lacquer thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	Description	Size	
	1903830	20066190385	RUSTOLEUM	FROSTED GLASS	CLEAR	312g	

GLOW IN THE DARK

RUSTOLEUM

FROSTED GLASS

SEA GLASS

312g

Rust-Oleum® Specialty Glow In The Dark glows for up to 2 hours. Apply to wood, metal, plaster, masonry or unglazed ceramic. Washes with soap and water. Fast-drying. Great for indoor and outdoor use on functional and decorative projects. Great for kids rooms, school projects and holiday decor.



257465

20066202477



5 " 10			1071 00 0				
Practical Coverage	:		0.7 to 0.9m ²				
Dry Times:							
Touch			15 min				
Handle			1-2 hours				
Recoat				ur of first coat otherwise	after 24 hours		
Shelf Life:			5 years				
Application:			Stir thoroughly. Thinning is not required. Avoid painting in direct sunlight or on hot surfaces. Use a good quality synthetic brush. Avoid excessive brushing as this will reduce film thickness. Use light, even strokes to ensure an even flow and the smoothest finish				
Substrates / Surfac	es:		Wood, Metal, Plaster, School Projects, Crafts				
Clean Up:			Brush - soap and water / Spray - lacquer thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	Platfrom	<u>Description</u>	<u>Size</u>	
	278733	20066248390	RUSTOLEUM	GLOW IN THE DARK MAX SPRAY	CLEAR	283g	



HIGH HEAT

Rust-Oleum® Specialty High Heat Spray retains color and finish up to 1200° F. Apply to grills, wood-burning stoves, radiators, engines or other metal items. Provides rust protection. Indoor or outdoor use. Durable, corrosion-resistant.













			T=				
Practical Coverage:			Brush 9.5 m ² / Spra	ay 0.8 m²			
Dry Times: Touch			Caray 20 min / Dr	uah 2 4 haur			
Handle			Spray - 30 min / Brush 2 - 4 hour Spray 1 - 2 hours / Brush 5-9 hour				
			1 ,		-6		
Recoat				ur of first coat otherwise	atter 48 nours / Brusn	aπer 9 nours	
Shelf Life: Application:			5 years				
			Sprays: Shake often during use. Hold can upright 10-16" from surface and spray in a steady back-and-forth motion, slightly overlapping each stroke. Keep the can the same distance from the surface. Keep the can in motion while spraying. Apply two or more light coats a few minutes apart to avoid drips and runs. Do not use near open flame. Brush Goods: Mix thoroughly to ensure any settled pigment is re-dispersed. Thin material only if necessary with mineral spirits. For brush or roller application, thin no more than 5%. Do not thin with gasoline, lacquer thinner, turpentine, etc. Apply with a good quality brush, nap roller, or conventional spray gun. A second coat is not recommended.				
Substrates / Surface	es:		Ideal for the exterior screens & automot	r of barbeque grills, wood s ive parts.	stoves, radiators, fire pit	s, fireplace	
Clean Up:			Sprays: Dries to touch in 30 minutes and to handle in 1-2 hours. Allow paint to dry for 1 hour before heating. In order to achieve full cure, the coating must be heat cured at 450°F for one hour. Product may emit smoke and harmless odor. Brush Goods: Dries to touch in 2-4 hours, to handle in 5-9 hours, and is fully dry in 24 hours. Allow paint to dry 24 hours before heating. When using the subject surface for the first time, open windows and provide ventilation as the new paint finish may emit smoke.				
Product Image	Product Code	<u>Barcodes</u>	Brand	Platfrom	Description	Size	
Emples (ser iii)	7778830	20066777883	RUSTOLEUM	HIGH HEAT	BAR-B-QUE BLACK	340g	
THE PARTY OF THE P	7716830	20066771683	RUSTOLEUM	HIGH HEAT	SILVER	340g	
	241169	20066163563	RUSTOLEUM	HIGH HEAT ULTRA	SEMIGLOSS BLACK	340g	
Sarvader Sar	241232	20066163587	RUSTOLEUM	HIGH HEAT ULTRA	AGED COPPER	340g	
	270201	20066227456	RUSTOLEUM	HIGH HEAT ULTRA	SILVER	340g	



LACQUER

Rust-Oleum® Specialty Lacquer Spray adds an ultra-hard, factory-like finish to furniture and accessories. Apply to wood, metal, plaster, masonry or unglazed ceramic. Hardens to high luster. Fast-drying. For indoor and outdoor use.



Practical Coverage	:		1.2m ²				
Dry Times:							
Touch			20 minutes				
Handle			30 minutes				
Recoat			Anytime				
Shelf Life:			5 years				
Application:				ame distance from the surfa or more light coats a few r			
Substrates / Surfac	es:		Wood, metal, and r	nore. Lacquer sprays are id	deal for furniture, lamps,	picture frames	
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	Description	<u>Size</u>	
	1906830	20066190682	RUSTOLEUM	LACQUER	CLEAR	312g	
	1905830	20066190583	RUSTOLEUM	LACQUER	BLACK	312g	
	1904830	20066190484	RUSTOLEUM	LACQUER	WHITE	312g	

POLYURETHANE SPRAY

Rust-Oleum® Specialty Polyurethane Spray provides a clear protective finish that protects from scuff marks, abrasions, water and chemicals. Apply to wood or metal. Lasts twice as long as varnish. For indoor use only. Gloss, semi-gloss or satin finish. Brings out the natural beauty of wood.





Practical Coverage	:		0.9-1.09 m2	0.9-1.09 m2				
Dry Times:			•					
Touch			2 hours					
Handle			4 hours					
Recoat			1 hour or after 24	<u>hours</u>				
Shelf Life:			5 years					
Application:			Apply two or more	light coats a few minutes a	part to avoid drips and r	uns.		
Substrates / Surfaces:			Metals such as doorknobs, hinges, and handles. Not recommended for linoleum, vinyl, or glazed tile. It may have an ambering effect on light colored surfaces.					
Clean Up:			Lacquer Thinners	Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	Description	<u>Size</u>		
	7872830	20066787288	RUSTOLEUM	POLYURETHANE SPRAY	SATIN	312g		
(mueron)	7870830	20066787080	RUSTOLEUM	POLYURETHANE	GLOSS	312a		

RUSTOLEUM

SPRAY



7870830

20066787080

GLOSS

312g



MIRROR EFFECT

Mirror Effect is a unique coating that is applied to the reverse side of glass or acrylic glass to create a reflective mirror like finish. It is great for glass vases, jars, framed glass, table tops, candle holders and more.



RUST-OLEUM



Practical Coverage	:		1.1m²				
Dry Times:							
Touch			5 minutes				
Handle			10 minutes				
Recoat	Recoat						
Shelf Life:			5 years				
Application: Substrates / Surfaces:			Apply using very thin coats, allowing the paint to dry for 1 minute between coats. Apply up to 5 coats to achieve the desired mirror effect. Paint will rapidly change in appearance and mirror effect will appear while coating dries. The painted side will appear dull, with the reverse side showing the mirror finish. Apply a thin coat of Rust-Oleum® Painters Touch+ Matte Clear. Glass vases, candleholders, framed glass, jars and tabletops. Apply to the reverse or opposite side of glass. For use on interior surfaces only.				
							Clean Up:
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size	
	286477	20066223410	RUSTOLEUM	MIRROR EFFECT SPRAY	GOLD	170g	
	267727	20066223410	RUSTOLEUM	MIRROR EFFECT SPRAY	SILVER	170g	

TRIPLE THICK GLAZE

Easily create a baked-glaze finish without the heat with Rust-Oleum® Specialty Triple Thick Glaze Spray. This crystal-clear, extra-thick aerosol creates a glass-like coating that is both decorative and protective.

•TRUSTED QUALITY SINCE 1921•





Practical Coverage			1.1m ²				
Dry Times:			•				
Touch			5 minutes				
Handle			20 minutes				
Recoat			1 hour or after 24	hours			
Shelf Life:							
Application:			Avoid spraying in very windy and dusty conditions. Cover surrounding area to protect from spray mist				
Substrates / Surfac	Substrates / Surfaces:			Wood, metal, wicker, plastic, glass, plaster, ceramic and paper. Can be used on interior and exterior surfaces			
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	Description	Size	
100000	264985	20066217365	RUSTOLEUM	TRIPLE THICK GLAZE	CLEAR	340g	





DÉCOR METALLIC

Rust-Oleum® Specialty Metallic Spray provides rich, shiny finish for decorating and accent pieces. Apply to wood, metal, plaster, masonry or unglazed ceramic. Made with real metal leafing flakes. Fast-drying. Indoor use only. Bright Reflective Finish.

+TRUSTED QUALITY SINCE 1921+





Practical Coverage	:		1.1m²				
Dry Times:							
Touch			1 hour				
Handle			4 hours				
Recoat			1 hour or after 24	<u>hours</u>			
Shelf Life:	Shelf Life:						
Application:				ar coating to avoid dulling t adhesion and hiding and is			
Substrates / Surfaces:			Wood, metal, plaste flakes.	er, masonry or unglazed ce	ramic. Made with real m	netal leafing	
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	<u>Description</u>	<u>Size</u>	
	1936830	20066193683	RUSTOLEUM	METALLIC SPRAY	BRASS	312g	
	1910830	20066191085	RUSTOLEUM	METALLIC SPRAY	GOLD	312g	
	1915830	20066191580	RUSTOLEUM	METALLIC SPRAY	SILVER	312g	

DESIGNER METALLIC SPRAY

Give your projects a soft, elegant sheen with Rust-Oleum® American Accents® Designer Metallic Spray. This durable finish provides a sophisticated luster that's perfect for frames, furniture, crafts, household decorations and much more. Fast-drying. For indoor and outdoor use.

Durable, corrosion-resistant.

•TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM® AMERICAN® ACCENTS



Practical Coverage	actical Coverage:			1.1m²				
Dry Times:								
Touch			10 minutes					
Handle			30 minutes					
Recoat	Recoat							
Shelf Life:	Shelf Life:							
Application:	Application:			llowed by 1 wet coat for the	e best appearance. A we	et coat should		
				applied to the surface.				
Substrates / Surfaces:			Wood, metal, cerar	nics, glass & more. Frame	s, furniture, crafts, house	ehold decorations.		
Clean Up:			Lacquer Thinners					
Product Image	Product Code	<u>Barcodes</u>	Brand	Platfrom	<u>Description</u>	Size		
	202719	20066112028	RUSTOLEUM	METALLIC SPRAY	AGED BRASS	312g		
10	202646	20066111854	RUSTOLEUM	METALLIC SPRAY	AGED BRONZE	312g		
11	202642	20066111847	RUSTOLEUM	METALLIC SPRAY	CLASSIC BRONZE	312g		



STONE CREATIONS

Bring the look and feel of natural stone to any surface with Rust-Oleum® American Accents® Stone Spray. This unique formula's textured, multitoned finish will transform ordinary objects into beautiful stonework.

•TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM® AMERICAN® ACCENTS









=	/ ICCL			A STATE OF THE PARTY OF THE PAR				
Practical Coverage	:		1.1m²					
Dry Times:								
Touch			15 minutes					
Handle			30 minutes					
Recoat			Anytime					
Shelf Life:			5 years					
Application:			apply a basecoat of total coverage in on set, then apply a sec coats.	orous surfaces and bare a color that blends well wi e coat. Apply one light coa cond coat. If additional coa	th the Stone finish. Do r at first. Wait 15 minutes u ats are needed, wait 15 r	not try to achieve until paint starts to ninutes between		
Substrates / Surfac	es:			nics, glass & more. For us	e on interior surfaces on	ly.		
Clean Up:			Lacquer Thinners					
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	Platfrom	<u>Description</u>	<u>Size</u>		
than the same of t	285028	20066277260	RUSTOLEUM	STONE CREATIONS	TRAVERTINE	340g		
Western Comments	238323	20066159399	RUSTOLEUM	STONE CREATIONS	GRANITE STONE	340g		
00 to 100	7995830	20066799588	RUSTOLEUM	STONE CREATIONS	PEBBLE	340g		
man day	7990830	20066799083	RUSTOLEUM	STONE CREATIONS	BLEACHED STONE	340g		
estates	7991830	20066799182	RUSTOLEUM	STONE CREATIONS	BLACK GRANITE	340g		
entral lates	238324	20066159405	RUSTOLEUM	STONE CREATIONS	MINERAL BROWN	340g		



STOPS RUST BRIGHT COAT

Turn everything you touch to shiny metallic with a can of Rust-Oleum® Stops Rust® Bright Coat Metallic Finish Spray Paint. In just minutes, you can transform ordinary objects, giving them a lavish shine that makes a brilliant impression. Distinctive, shiny metallic finish.



		· venen					
Practical Coverage	:		0.56m ²				
Dry Times:							
Touch			1 hour				
Handle			1 hour				
Recoat	Recoat						
Shelf Life:			5 years				
Application: Substrates / Surfaces:			Provide a durable protective coating with excellent resistance to rust, and excellent resistance to abrasion, fading, chipping, and dulling. These sprays apply easily, provide excellent coverage and dry fast to a tough attractive finish. Aluminum is appropriate for outdoor metal surfaces when primed first. Gold, Chrome, and Bronze should be used indoors as they will tarnish if placed outdoors. Wood, metal, ceramics, glass & more. For use on interior surfaces only on some				
Clean Up:			colours Lacquer Thinners				
Product Image	Product Code	Barcodes	Brand Platfrom Description Size				
To and the second secon	7718830	20066771881	RUSTOLEUM	BRIGHT COAT METALLIC	GLOSS CHROME	312g	
THE CONTRACT	7710830	20066771089	RUSTOLEUM	BRIGHT COAT METALLIC	GOLD	312g	



STOPS RUST ENAMEL

Don't settle for anything less than the #1 rust-preventative paint on the market. Nothing protects your projects like Rust-Oleum® Stops Rust® Protective Enamel. With over 50 popular colors in four finishes (gloss, semi-gloss, satin and flat), it's never been easier to refinish, refresh and relax!

Ultra durable, corrosion-resistant spray paint

Superior coverage over a variety of surfaces such as metal, wood, ceramic and more. Beautiful finish with long lasting color. Any-angle spray system allows you to spray at any angle for those hard to reach areas. Comfort spray tip helps eliminate finger fatigue for those larger projects.





				THE STATE OF THE S		
Practical Coverage	:		1.1m²			
Dry Times:						
Touch			2-4 hours			
Handle			5-9 hours			
Recoat			1 hour or after 24	<u>hours</u>		
Shelf Life:						
Application:			Spray in a steady back-andforth motion, slightly overlapping each stroke. Keep the can the same distance from the surface. Keep the can in motion while spraying. Apply 2 or more light coats a few minutes apart to avoid runs and sags			
Substrates / Surfaces:			Ferrous, non-ferrous metal and wood surfaces. Not for use on galvanised metal			
Clean Up:			Lacquer Thinners			
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	Description	Size
la cop	215215	20066133801	RUSTOLEUM	RUST REFORMER		291g
Friday	7780830	20066778088	RUSTOLEUM	STOPS RUST PRIMER	FLAT WHITE CLEAN METAL	340g

STOPS RUST HAMMERED

Rust-Oleum® Hammered Spray Paint adheres directly to rust and instantly hides flaws and imperfections with its modern, glossy, hammered finish. Perfect for old wheelbarrows, wheel rims, patio furniture, railings, and more.

Practical Coverage:	1.1m²
Dry Times:	
Touch	15 minutes
Handle	24 hours
Recoat	1 hour or after 24 hours
Shelf Life:	5 years
Application:	Spray in a steady back-andforth motion, slightly overlapping each stroke. Keep the can the same distance from the surface. Keep the can in motion while spraying. Apply 2 or more light coats a few minutes apart to avoid runs and sags.
Substrates / Surfaces:	Adheres directly to rust and instantly hides flaws and imperfections with its modern, glossy, hammered finish. Perfect for old wheelbarrows, wheel rims, patio furniture, railings, and more.
Clean Up:	Lacquer Thinners

Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	<u>Description</u>	Size
	210849	20066126827	RUSTOLEUM	STOPS RUST HAMMERED SPRAY	COPPER	340g
	210880	20066126834	RUSTOLEUM	STOPS RUST HAMMERED SPRAY	BROWN	340g



286564

20066278250



STOPS RUST VINTAGE METALLIC

If you like your color with a little extra dazzle, Rust-Oleum® Stops Rust® Metallic Spray Paint is for you. With actual metallic flakes mixed right in, this weather-resistant coating is perfect for heavy-use items like mailboxes, bikes, door hardware and more. For indoor & outdoor use.

Brilliant metallic finish. Durable, corrosion-resistant.

iii, uiis weauii	er-resistant coating	Brilliant metallic	finish. Durable, corr		a more. I or indoor &	odidoor dae.
Practical Coverage	:		1.1m²			
Dry Times:			•			
Touch			20 minutes			
Handle			4 hours			
Recoat			1 hour or after 48	<u>hours</u>		
Shelf Life:			5 years			
Application:			Apply two or more medium coats at moderate speed.			
Substrates / Surfac	es:		With actual metallic flakes mixed right in, this weatheavy-use items like mailboxes, bikes, door hard			g is perfect for
Clean Up:			Lacquer Thinners			
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	Description	Size
Mary de tille Without I	286524	20066278496	RUSTOLEUM	STOPS RUST VINTAGE METALLIC	WARM GOLD	312g
Ti A						

STOPS RUST MUTLI COLOR TEXTURED

RUSTOLEUM

STOPS RUST

VINTAGE METALLIC

ROSE GOLD

312g

Instantly add color and dimension with Rust-Oleum® Stops Rust® MultiColor Textured Spray Paint. Whatever look you're after, from rugged to elegant to earthy, you'll find a color combination to fit your vision. Create a weather-resistant look that lasts and lasts. Indoor & outdoor. Durable, corrosion-resistant. Premium high-end look.

Practical Coverage	:		1.1m²					
Dry Times:								
Touch			15 minutes					
Handle			1-2 hours					
Recoat								
01 171 17			1117	t or clear coat within 1 hou	r or after 48 hours			
Shelf Life:			5 years	P. 1. C. 1. C. 1.	1.500/	1.0		
Application:			coats a few minutes	to apply a light first coat, ta apart	arget 50% coverage. Ap	ply 2 or more light		
Substrates / Surfac	es:		Metal, wood, concre protective finish	ete or masonry. Use on fur	niture, fixtures and déco	or for a textured,		
Clean Up:			Lacquer Thinners					
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size		
has on a se	223524	20066137434	RUSTOLEUM	STOPS RUST MULTI COLOR TEX	DESERT BISQUE	340g		
	223523	20066137427	RUSTOLEUM	STOPS RUST MULTI COLOR TEX	AUTUMN BROWN	340g		
	223525	20066137441	RUSTOLEUM	STOPS RUST MULTI COLOR TEX	AGED IRON	340g		
	239122	20066161323	RUSTOLEUM	STOPS RUST MULTI COLOR TEX	RUSTIC UMBER	340g		



STOPS RUST METALLIC

If you like your colour with a little extra dazzle, Rust-Oleum® Stops Rust® Metallic Spray is for you. With actual metallic flakes mixed right in, this weather-resistant coating is perfect for heavy-use items like mailboxes, bikes, door hardware and more.

Practical Coverage:			1.1m²			
Dry Times:						
Touch			10 minutes			
Handle			30 minutes			
Recoat			24 hours			
Shelf Life:			5 years			
Application:				nedium coats at moderate		
Substrates / Surfaces:		With actual metallic flakes mixed right in, this weather-resistant coating is perfect for				
			heavy-use items like	e mailboxes, bikes, door ha	ardware.	
Clean Up:			Lacquer Thinners			
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size
	7271830	20066727185	RUSTOLEUM	STOPS RUST ENAMEL	SILVER	312g

STOPS RUST TEXURED

Rust-Oleum® Textured Spray Paint provides distinctive, durable coating to metal, wood, concrete or masonry. Apply to chairs, tables, light fixtures, swing sets, tool chests and more. It features a comfort tip with a wider finger pad to reduce fatigue caused by continuous spraying.

Upscale Finish. Indoor/outdoor. Durable, corrosion-resistant.

		Opscale Finish, Indoo	r/outdoor. Durable,	corrosion-resistant.					
Practical Coverage			0.9m²						
Dry Times:			•						
Touch			2-4 hours						
Handle			5-9 hours						
Recoat			1 hour or after 48	<u>hours</u>					
Shelf Life:	Life:		5 years			5 years			
Application:			Smooth, hard, or g	lossy finishes should be sca	rified by sanding				
Substrates / Surfac	es:		Chairs, tables, light fixtures, swing sets, tool chests						
Clean Up:			Lacquer Thinners						
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size			
	241255	20066164010	RUSTOLEUM	STOPS RUST TEXT	DARK BROWN	340g			

STOPS RUST ANTI SLIP

Rust-Oleum® AntiSlip creates a non-skid surface on concrete, metal and wood. The fast drying formula dries clear and can be applied to ramps, stairs, railings and more. Slip resistant coating. Great for steps, decks, porches, walkways, garage floors, ramps, tile floors and more. Clear finish. For indoor and outdoor use.

		Clear finish.	For indoor and out	door use.		
Practical Coverage	:		1.1m²			
Dry Times:			•			
Touch			2 - 4 hours			
Handle			Apply a second coa	t within 1 hour or after 48 h	nours	
Recoat			Allow surfaces to di	y for 24 hours before use		
Shelf Life:			5 years			
Application:			Priming is not necessary but additional coats may be required on porous surfaces as unfinished wood and concrete.			us surfaces such
Substrates / Surfac	es:		Great for steps, decks, porches, walkways, garage floors, ramps, tile floors. The drying formula dries clear and can be applied to ramps, stairs, railings			
Clean Up:			Lacquer Thinners			
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size
Accessing a series of the seri	271455	20066229665	RUSTOLEUM	STOPS RUST ANTI-SLIP	CLEAR	340g





TUB & TILE

Rust-Oleum Tub & Tile Aerosol provides a one-step solution to refinish tubs, sinks and showers in just minutes. This unique finish bonds to porcelain and ceramic providing outstanding adhesion, durability and color retention in high moisture areas. Epoxy acrylic formula. Withstands extreme hot temperatures. Leaves a smooth, glossy, waterproof finish.

Practical Coverage			Product dependant as the Refinishing kit will be different from the spray and touch-up				
Dry Times:							
Γouch			1 hour - Refinishing	kit			
Handle			1-2 hours - Refinish	ing kit			
Recoat			3 days for full cure	on Refinishing kit			
helf Life:			5 years				
Application:			Please request the	step by step instructions fr	om a representative		
Substrates / Surfac	es:			orcelain or fiberglass			
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	<u>Description</u>	Size	
Challed Street S	244166	20066171438	RUSTOLEUM	TUB AND TILE TOUCH-UP	WHITE	13,30ml	
	280882	20066247201	RUSTOLEUM	TUB AND TILE AEROSOL	WHITE	340g	
hds.No	384165	20066024185	RUSTOLEUM	TUB AND TILE	WHITE	946ml	

LEAKSEAL

Repair and prevent leaks on a wide range of demanding surfaces with Rust-Oleum® LeakSeal® Spray. This rubberized coating seals cracks, fills small holes and provides firm-but-flexible protection against moisture and rust on surfaces that need it most. Great for gutters, roofs, flashing, ductwork, PVC, masonry, concrete and more. Seals leaks and cracks water-tight. Paintable finish.

D	_		4.42			
Practical Coverage	:		1.1m²			
Dry Times:						
Touch			2 hours			
Handle			2-3 hours			
Recoat	15-30 minutes with Leakseal again. Can be top-coated with water-bipaints after 24 hours.			p-coated with water-bas	ed or oil-based	
Shelf Life:			5 years			
Application:			It is recommended to apply a light first coat. Apply a second heavier coat to ens proper coverage. A thicker film can be achieved by moving the nozzle closer to surface. Initial spray may have some foaming or bubbling, but will dissipate as t coating dries. For best results, apply 2 coats.			closer to the
Substrates / Surfaces:			Gutters, roofs, flash	ing, ductwork, PVC, maso	nry, concrete	
Clean Up:			Lacquer Thinners			
Product Image	Product Code	<u>Barcodes</u>	Brand	Platfrom	Description	<u>Size</u>
intel® Soil and Soil	265494	20066218744	RUSTOLEUM	LEAKSEAL	BLACK	340g
marra com large, free	265495	20066218751	RUSTOLEUM	LEAKSEAL	CLEAR	340g



INDUSTRIAL CHOICE ANTI SLIP

Add traction to slippery surfaces with Rust-Oleum Industrial Choice® AS2100 System Anti-Slip Spray. This high-performance formula sprays on easily and creates a tough, slip-resistant surface that helps prevent slips and falls. Easier and less expensive per square foot than anti-slip tape; great for stairs, ramps, etc. Resists cracking, peeling and mild chemicals; easy to touch-up or reapply.

Practical Coverage:			1.3m²				
	•		1.51117				
Dry Times:			T				
Walk on			24 - 48 hours				
Handle			24 - 48 hours				
Recoat			1-2 hours				
Shelf Life:			5 years				
Application:			ALL SURFACES: Remove all dirt, grease & oil by washing the surface with Kru Kutter® Original Cleaner Degreaser Rinse with fresh water and allow to thoroug STEEL: Remove loose rust, mill scale, and deteriorated previous coatings. PREVIOUSLY COATED: Previously coated surfaces must be sound and in goo condition. Smooth, hard, or glossy finishes should be sanded.			to thoroughly dry. tings.	
Substrates / Surface	es:		Stairs, ramps, decks				
Clean Up:			Lacquer Thinners				
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size	
X	AS2102838	20066210298	RUSTOLEUM	INDUSTRIAL CHOICE	CLEAR	425g	
3	AS2192838	20066219284	RUSTOLEUM	INDUSTRIAL CHOICE	WHITE	425g	

PEELCOAT

Rust-Oleum® Peel Coat® is a peelable rubber coating that infinite customization for vehicles. This premium formula is easy to peel, safe to wash and can be applied to metal, plastic, chrome, glass and more. The all-weather coating also protects against rust and road debris. Recommended removal within 6 months. Paint rims, racing stripes or add other customizations to your vehicle. Peelable rubber coating allows you to change up your look whenever you want. Can go through automatic car wash or be hand washed.

Practical Coverage:			0.75m²			
Dry Times:			•			
Touch			20 minutes			
Handle			1 hour			
Recoat			20 minutes			
Shelf Life:			5 years			
Application:			Wash vehicles thoroughly and ensure you've removed any wax or grease from the surface. Make sure the surface is completely dry before applying Peel Coat. Cover and mask off any areas that should not be painted with tape, plastic sheeting Target 50% coverage on the first coat and apply four or more coats for complete coverage. The more coats, the easier the paint is to remove. Allow each coat to dry to a finish. This should take about 5-10 minutes between concept begin removing tape and other masking immediately after the last coat has been applied to keep clean edges. Let Peel Coat set for at least one hour before touching or driving the vehicle, wait a least 24 hours before washing. Remove Peel Coat within 6 months			astic sheeting, etc. r complete s between coats. It has been
Substrates / Surface	es:		Metal, plastic, chrome, glass			
Clean Up:			Lacquer Thinners			
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	Size
	276779	20066240530	RUSTOLEUM PEELCOAT MATTE BLACK 312g			
	284320	20066273613	RUSTOLEUM	PEELCOAT	GRAPHITE	312g





AUTOMOTIVE

Rust-Oleum Automotive range offers a full solution, to prime, paint or repair - it has got you covered Rust-proof your undercarriage, touch up your car paint, or even apply customized, temporary racing stripes. Make your vehicle look new with Rust-Oleum. For more information please refer to your automotive trade brochure.

Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	Description	<u>Size</u>
	251591	20066191740	RUSTOLEUM	AUTO CALIPER PAINT	RED	340g
	251574	20066191474	RUSTOLEUM	AUTO TRIM & BUMPER	MATT BLACK	312g
	248914	20066186364	RUSTOLEUM	AUTO TRUCK BED	BLACK	425g





PRIMERS

Get the best results for your project! Whether you are adding a top coat to a bare metal to plastic, Spraymate offers a variety of Primers to prep your surface for optimal results.



Practical Coverage			0.8m²					
Dry Times:								
Touch			5-10 minutes					
Handle			20 minutes					
Recoat			After 10 minutes					
Shelf Life:			5 years					
Application:				e used before applying top	coat. Recommended fo	r use in		
Substrates / Surfac	es:		Glass, Wood, Meta	I, Stone				
Clean Up:			Lacquer Thinners					
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size		
	2512	6007276000639	Spraymate	Primers	Primer Grey	250ml		
	2535	6007276000837	Spraymate	Primers	Primer White	250ml		
の意味が	2698	6007276000868	Spraymate	Primers	Primer Red Oxide	250ml		
	2700	6007276000851	Spraymate	Primers	Plastic Primer Grey	250ml		



SPRAYMATE FAST DRYING

Spraymate Fast Drying Lacquer is a lacquer-based spray paint formulated with a rust inhibitor suitable for both interior and exterior conditions. It is durable enough to maintain the rich, deep colour of the spray paint.



		MACH MACH MACH	Main Men Me	The state of the s			
Practical Coverage	:		0.8m²				
Dry Times:							
Touch			5-10 minutes				
Handle			20 minutes				
Recoat			After 10 minutes				
Shelf Life:			5 years				
Application:				face is clean and dust free.	Always use the correct	nrimer Snrav in a	
принации.			well ventilated area		7 awayo add and dorroot	primor. Opray iir a	
			well verillated area				
Substrates / Surfac	.00.		Wood Metal Stone	e and various types of plast	tice		
Clean Up:			Lacquer Thinners	s and various types of plas	100		
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size	
9	2501	6007276000516	Spraymate	General Purpose	Antique Ivory	250ml	
	2502	6007276000523	Spraymate	General Purpose	Appliance White	250ml	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	2503	6007276000530	Spraymate	General Purpose	Azure Blue	250ml	
	2504	6007276000547	Spraymate	General Purpose	Beige	250ml	
	2505	6007276000554	Spraymate	General Purpose	Brilliant Green	250ml	
	2506	6007276000561	Spraymate	General Purpose	Clear Lacquer Gloss	250ml	
	2547	6007276004231	Spraymate	General Purpose	Clear Lacquer Matt	250ml	
	2507	6007276000578	Spraymate	General Purpose	Cream	250ml	
**************************************	2508	6007276000585	Spraymate	General Purpose	Dark Brown	250ml	



	2509	6007276000592	Spraymate	General Purpose	Electric Blue	250ml
0 20	2510	6007276000608	Spraymate	General Purpose	Gloss Black	250ml
	2511	6007276000615	Spraymate	General Purpose	Gloss White	250ml
10 mg	2531	6007276000622	Spraymate	General Purpose	Golden Brown	250ml
8 E	2513	6007276000646	Spraymate	General Purpose	International Orange	250ml
	2517	6007276000653	Spraymate	General Purpose	Light Grey	250ml
\$ 15 m	2756	6007276002961	Spraymate	General Purpose	Satin Lilac	250ml
	2514	6007276000660	Spraymate	General Purpose	Machinery Grey	250ml
8	2515	6007276000684	Spraymate	General Purpose	Matt Black	250ml
	2516	6007276000691	Spraymate	General Purpose	Matt White	250ml
0	2518	6007276000707	Spraymate	General Purpose	Pacific Blue	250ml
0 1	2519	6007276000714	Spraymate	General Purpose	Pastel Green	250ml
8 K	2520	6007276000721	Spraymate	General Purpose	Pastel Yellow	250ml
	2523	6007276000745	Spraymate	General Purpose	Post Office Red	250ml





	2524	6007276000752	Spraymate	General Purpose	Royal Blue	250ml
	2525	6007276000769	Spraymate	General Purpose	Satin Black	250ml
8	2526	6007276000783	Spraymate	General Purpose	Signal Red	250ml
	2527	6007276000790	Spraymate	General Purpose	Sky Blue	250ml
	2528	6007276000806	Spraymate	General Purpose	Sunshine Yellow	250ml
	2529	6007276000813	Spraymate	General Purpose	Tangerine	250ml
	2757	6007276002978	Spraymate	General Purpose	Turqouise	250ml
8	2522	6007276000820	Spraymate	General Purpose	Violet	250ml
	2532	6007276000677	Spraymate	General Purpose	Maroon	250ml
**************************************	2540	6007276000776	Spraymate	General Purpose	Shamrock Green	250ml
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	2751	6007276002381	Spraymate	General Purpose	Satin White	250ml
	2752	6007276002398	Spraymate	General Purpose	Satin Desert Sand	250ml
8 S	2753	6007276002404	Spraymate	General Purpose	Satin Chocolate	250ml
	2754	6007276002411	Spraymate	General Purpose	Satin Mocha	250ml





8 KM	2755	6007276002428	Spraymate	General Purpose	Moss Green Satin	250ml
10 E	2760	6007276002435	Spraymate	General Purpose	Berry Blush	250ml
10 mm	2761	6007276002442	Spraymate	General Purpose	Lime Green	250ml
	2762	6007276002503	Spraymate	General Purpose	New Pink	250ml







HI HEAT

Spraymate Hi Heat spray paint is a durable enamel formulated paint to resist temperatures of up to 350 degrees celsius. Hi Heat can be used on exhausts, manifolds and various other heated applications. Hi Heat does not gloss, but has a velvet finish.

			• •	9			
Practical Coverage			0.8m²				
Dry Times:			1				
Touch			5-10 minutes				
Handle	Handle						
Recoat			20 minutes				
Shelf Life:			5 years				
Application:				s to be shaken extra vigoro t use a primer. High heat p around 120°C.			
Substrates / Surfaces:			Metal				
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	<u>Description</u>	<u>Size</u>	
9 33	2570	6007276000905	Spraymate	Speciality	Hi Heat Black	250ml	
	2572	6007276000929	Spraymate	Speciality	Hi Heat Silver	250ml	
	2573	6007276000936	Spraymate	Speciality	Hi Heat Red	250ml	

HAMMERTONE

Spraymate Hammertone spray paint is a fast drying lacquer, which gives a hammered effect on most surfaces. It is ideal for, safes, machines, office furniture, garden tools, toolboxes and various other applications.

		, 3	•				
Practical Coverage	:		0.8m²				
Dry Times:			•				
Touch			5-10 minutes				
Handle			20 minutes				
Recoat			20 minutes				
Shelf Life:			5 years				
			Apply one solid coa	it, multiple coats will influen	ice the hammer effect a	nd may result in a	
Substrates / Surfaces:			Metal. Wood, Stone. Plastic, Glass				
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	Platfrom	Description	Size	
	2597	6007276000899	Spraymate	Rust Preventative	Hammertone Grey	250ml	
	2593	6007276004149	Spraymate	Rust Preventative	Hammertone Charcoal	250ml	





ENGINE ENAMEL

Spraymate Engine Enamel spray paint is a high-gloss polyurethane enamel suitable for surfaces that sustain high temperatures such as, engines and heated pipes. Engine Enamel is a specially developed with heat resistant properties to withstand temperatures of up to 110°C whilst still maintaining its deep, rich colours. There is no peeling or cracking, just a durable lasting finish.

Prooficel Covers			0 0m²					
Practical Coverage: Dry Times:			0.8m²					
Touch			5-10 minutes					
Handle								
Recoat			20 minutes					
Shelf Life:			20 minutes 5 years					
				al aurface in alcon, condes	down and from of arong	a and ail In		
Application:			extremely cold cond	al surface is clean, sanded litions, warm the can slight	ly to 40°C.			
Substrates / Surfaces:			a clean, grease and	and pipes. Do not use a p oil free surface. Shake the				
Clean Up:			Lacquer Thinners		T			
Product Image	Product Code	<u>Barcodes</u>	<u>Brand</u>	<u>Platfrom</u>	<u>Description</u>	Size		
	2581	6007276000943	Spraymate	Automotive	Engine Enamel Cat Yellow	250ml		
	2575	6007276000950	Spraymate	Automotive	Engine Enamel Gloss Black	250ml		
	2576	6007276000967	Spraymate	Automotive	Engine Enamel Ford Blue	250ml		
ilka.	2577	6007276000974	Spraymate	Automotive	Engine Enamel John Deere Green	250ml		
	2578	6007276000981	Spraymate	Automotive	Engine Enamel Massey Ferguson Grey	250ml		
	2579	6007276000998	Spraymate	Automotive	Engine Enamel Massey Ferguson Red	250ml		
	2580	6007276001001	Spraymate	Automotive	Engine Enamel Silver Engine	250ml		
	2582	6007276001018	Spraymate	Automotive	Engine Enamel Grotto Blue	250ml		



METALLICS

SPRAYMATE Metallic spray paint is manufactured with silver metallic flake, giving the application a unique shimmer effect. It is suitable for most substrates such as, wood, metal, aluminium, glass, stone and various types of plastics. Shimmer effect. Fast drying & durable. For indoor & outdoor use.

Practical Coverage	•		outdoor use.						
	•		0.0111						
Ory Times:			TE 40 :						
ouch			5-10 minutes						
Handle			20 minutes						
Recoat			20 minutes						
Shelf Life:			5 years						
Application:			Use a Clear Lacque & tarnishing.	er on top of the metallic to	give it a high gloss and p	revent oxidation			
Substrates / Surfac	es:		Wood, metal, stone	e, ceramic, plastic					
Clean Up:	Draduat Cada	Danasdas	Lacquer Thinners	Dietfus	Description	S:			
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	<u>Description</u>	Size			
	2560	6007276001032	Spraymate	Speciality	Metallic Cast Iron	250ml			
	2551	6007276001049	Spraymate	Speciality	Metallic Blue	250ml			
4	2552	6007276001056	Spraymate	Speciality	Metallic Bronze	250ml			
	2563	6007276002947	Spraymate	Speciality	Metallic Clear	250ml			
	2553	6007276001063	Spraymate	Speciality	MetallicGeen	250ml			
	2554	6007276001070	Spraymate	Speciality	MetallicRed	250ml			
	2555	6007276001087	Spraymate	Speciality	MetallicSilver	250ml			
	2562	6007276002954	Spraymate	Speciality	Metallic Sparkle Silver	250ml			
	2556	6007276001094	Spraymate	Speciality	MetallicChrome	250ml			
	2557	6007276001100	Spraymate	Speciality	Metallic Natural Copper	250ml			
	2558	6007276001117	Spraymate	Speciality	Metallic Rich Pale Gold	250ml			



\$2.00 miles	2559	6007276001124	Spraymate	Speciality	Metallic Super Chrome	250ml
	3005	6007276003005	Spraymate	Speciality	Metallic Rose Gold	250ml

FLUORESCENT

Spraymate Fluorescent spray paint is an multipurpose, high coverage spray paint for interior and exterior use. Spraymate's exclusive formulation results in a matt finish that does not crumble, flake or rub off. Ideal for hobby toys, safety equipment and school projects.



Practical Coverage	:		0.8m²					
Dry Times:								
Touch			5-10 minutes					
Handle			20 minutes					
Recoat			20 minutes					
Shelf Life:			5 years					
Application:			Always use a white primer before applying. For a gloss finish, apply only polyurethane clear gloss (not clear lacquer). For polystyrene applications, apply 2 coats of PVA paint and ensure that the polystyrene is completely covered before applying Fluorescent.					
Substrates / Surfac	es:			e, ceramic (not glazed), pla	stic			
Clean Up:			Lacquer Thinners					
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	<u>Description</u>	<u>Size</u>		
	2586	6007276001247	Spraymate	Speciality	Fluorescent Fire Orange	250ML		
	2587	6007276001254	Spraymate	Speciality	Fluorescent Yellow	250ML		
	2588	6007276001261	Spraymate	Speciality	Fluorescent Neon Pink	250ML		
	2589	6007276001278	Spraymate	Speciality	Fluorescent Signal Green	250ML		



Spraymate@	® Microwave spray	paint is a specially formulate	MICROWAVE d paint used for co	pating and revamping m	icrowave interiors and	d exteriors.
Practical Coverage:			0.8m²			
Dry Times:						
Touch			5-10 minutes			
Handle			20 minutes			
Recoat			20 minutes			
Shelf Life:			5 years			
Application:				y paint (A fine wire brush v		
Substrates / Surfac	es:		Meand the inside of the microwave lightly with sand paper.			
Clean Up:			Lacquer thinners			
Product Image	Product Code	Barcodes	Brand	<u>Platfrom</u>	Description	<u>Size</u>
*(B)_]	2703	6007276004101	Spraymate	Speciality	Microwave Spray White	250ml

Spraymate S	andblast is a Semi	-transparent coating that give Sandblast can be use			visible when sprayed	d onto glass.	
Practical Coverage:			0.8m²				
Dry Times:							
Touch			5-10 minutes				
Handle			20 minutes				
Recoat			20 minutes				
Shelf Life:			5 years				
Application:			Apply on to sliding doors and windows. Use the alcohol wipe in the cap or a clean cloth and methylated spirits to clean the glass before use. Not to be used on surfaces that will be submerged in water. It is not an etching spray. Can be removed by rubbing down with lacquer thinners.				
Substrates / Surfaces:			Interior use only. Glass, Mirror				
Clean Up:			Methylated Spirits / Acetone				
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size	
	2681	6007276004743	Spraymate	Sand Blast	Mist Grey	250ml	

WOODSTAIN

From staining to finishing, Spraymate® Wood Care products protect your wood projects with superior quality. Fast-drying formulas help you complete your project in less time. Give your wood projects the gift of ultimate protection and lasting beauty with Spraymate® Wood Care Range.



Practical Coverage:			0.8m²				
Dry Times:							
Touch			5-10 minutes				
Handle			20 minutes				
Recoat			20 minutes				
Shelf Life:			5 years				
Application:			Apply directly to sanded smooth bare wooden surface. Topcoat with topcoat for wood.				
Substrates / Surfaces:			Wood				
Clean Up:			Lacquer Thinners				
Product Image	Product Code	<u>Barcodes</u>	Brand	<u>Platfrom</u>	Description	Size	
**************************************	2533	6007276001193	Spraymate	Wood	Polyuerthane Clear Gloss	250ml	
(1) The (2)	2534	6007276001209	Spraymate	Wood	Polyuerthane Clear Satin	250ml	





ARTIST FIXATIVE

SPRAYMATE® Artist Fixative is a fast drying fixative that provides 100% protection against dusting, smudging and fading to most forms of dry media.

Spraymate Anti-Tarnish is a transparent

and protective coating with excellent adherence to silver, copper, nickel, tin and brass. Anti-Tarnish prevents discolouration and acts as a protective layer through which liquids and other chemicals cannot penetrate.

			•	-			
Practical Coverage:			0.8m²				
Dry Times:							
Touch			5-10 minutes				
Handle			20 minutes				
Recoat			20 minutes				
Shelf Life:			5 years				
Application:			Compatibility testing	g is a must! Test product o	n something other than	the finished	
			product before usin	g.			
Substrates / Surfac	es:		Metal, Brass				
Clean Up:			Lacquer Thinners				
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	Size	
* IS	2601	6007276001612	Spraymate	Arts & Crafts	Artist Fixative Gloss	250ml	
	2602	6007276001629	Spraymate	Arts & Crafts	Artist Fixative Matt	250ml	
	2603	6007276001636	Spraymate	Arts & Crafts	Anti Tarnish Clear	250ml	

CHALKBOARD

SPRAYMATE Chalk Board spray paint is a lacquer-based spray paint which forms a writable and erasable chalkboard finish. Once the chalk board surface is dry and in use, it can be easily wiped with a wet cloth, repeatedly.

Practical Coverage:			0.8m²					
Dry Times:								
Touch			5-10 minutes					
Handle			20 minutes					
Recoat			20 minutes					
Shelf Life:	Shelf Life:			5 years				
Application:			With a new wood, sand down the surface ensuring a smooth surface. Use a grey primer as a base coat. Use self-etch primer on glass and other smooth or glazed surfaces. Apply 2 coats of chalkboard, and allow it to dry for 2 hours before use.					
Substrates / Surfaces:			Walls, Kids Projects, Wood, Glass					
Clean Up:			Lacquer Thinners					
Product Image	Product Code	Barcodes	Brand	Platfrom	Description	<u>Size</u>		
	2705	6007276002985	Spraymate	Speciality	Chalk Board Black	250ml		



W W W.Casslecti.co.zw	CASSIECH
	-



38









Sales Representatives:

Dave Dickens

+263 782 98 98 98 sales@casstech.co.zw

Charity Nyajeka

+263 772 190 190 sales2@casstech.co.zw

Pam Johnstone

+263 772 133 089 sales4@casstech.co.zw

Tele-Sales

+263 782 940 065 sales3@casstech.co.zw

Business Details:

ADDRESS

346 Samora Machel Avenue, Eastlea, Harare, Zimbabwe PO Box GD719 Greendale, Harare

PHONE NUMBERS

Landline: +263 242 480507 or 9 Landline: +263 242 498 903 or 5

Cell: +263 782 783 471 VoIP: +263 8677 175 609

WEBSITE

www.casstech.co.zw


COMPANY INFORMATION

Cassette Technologies (Pvt) Ltd. T/A Casstech

BP#: 200001171 (RTGS)

VAT Number: 10029885 (RTGS) BP#: 300001244 (NOSTRO)

VAT Number: 10086784 (NOSTRO)

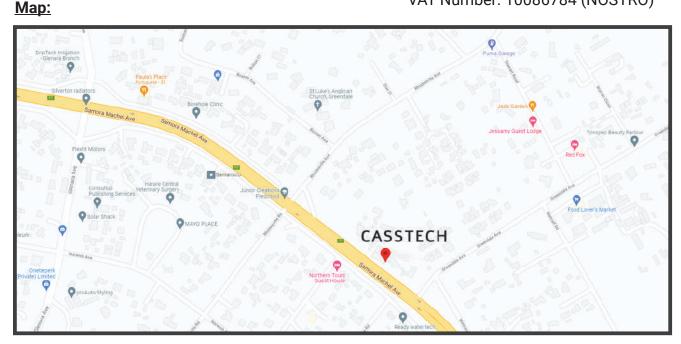

E.&O.E: We reserve the right to change prices at any time without prior notice. Products may vary from pictures.





































ADDRESS

346 Samora Machel Avenue, Eastlea, Harare, Zimbabwe

PHONE NUMBERS

Landline: +263 242 480507 or 9 Landline: +263 242 498 903 or 5

Cell: +263 782 783 471 VoIP: +263 8677 175 609

SALES REPS

Dave Dickens

+263 782 98 98 98 sales@casstech.co.zw

Charity Nyajeka

+263 772 190 190 sales2@casstech.co.zw **Pam Johnstone**

+263 772 133 089 sales4@casstech.co.zw

Tele-Sales

+263 782 940 065 sales3@casstech.co.zw

www.casstech.co.zw

PAINTS & ACCESSORIES